


## Expanding HS Rivet **HSECAP**



<b>Head Type</b>	Countersunk Head
<b>Material(Body/Mandrel)</b>	AL Alloy (5056A) / AL Alloy (7075A)
<b>Finish(Body/Mandrel)</b>	Polished / Polished

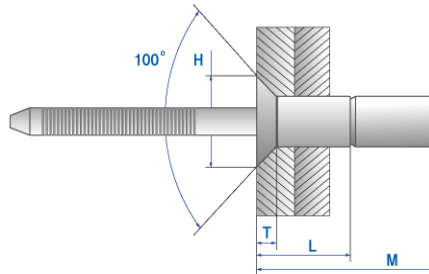

H = Head Diameter  
T = Head Thickness  
L = Body Length  
M = Length

\*Dimensions in millimeters

Part Number	Rivet Diameter (D) nom.	Hole Size	Body Length(L) max.	Length(M) max.	Grip Range	Head Diameter (H) max.	Head Thickness (T) max.	Standard Strength (kN) typ.	
								Shear	Tensile
HSECAP-048130	4.8	4.9~5.1	13.0	20.0	3.2~8.4	8.8	2.2	2.7	2.2
HSECAP-048170			17.0	24.0	7.7~12.7				
HSECAP-064170	6.4	6.6~6.9	17.0	27.0	4.1~12.1	10.4	2.4	5.8	4.0
HSECAP-064235			23.5	37.0	10.5~18.4				