




<b>Head Type</b>	Truss Head
<b>Material</b>	Carbon Steel
<b>Finish</b>	Zinc Plate

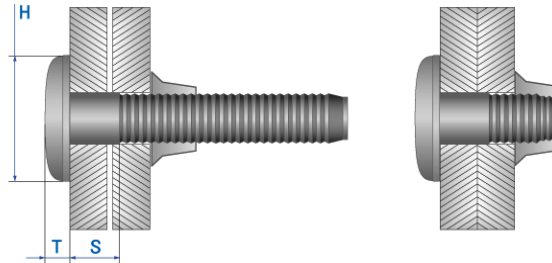


H = Head Diameter  
T = Head Thickness  
S = Shank Length

\*Dimensions in millimeters

Part Number	Rivet Diameter (D) nom.	Hole Size	Shank Length(S) min.	Grip Range	Head Diameter (H) max.	Head Thickness (T) max.	Standard Strength (kN) typ.	
							Shear	Tensile
LMPTCZ-048023	4.8	4.8	2.3	1.6~15.9	11.9	2.8	8.2	10.0
LMPTCZ-048084			8.4	7.9~31.7				
LMPTCZ-064022	6.4	6.4	2.2	1.6~15.9	15.1	3.1	11.8	16.0
LMPTCZ-064091			9.1	7.9~31.7				

<b>Collar Type</b>	Flange
<b>Material</b>	Carbon Steel
<b>Finish</b>	Zinc Plate



Part Number	Pin Diameter (D) nom.	F	G	H	J	K
LMCFCZ-048000	4.8	4.7~5.0	7.7~7.9	6.3~7.2	0.7~1.6	9.1~10.0
LMCFCZ-064000	6.4	6.5~6.8	10.2~10.4	8.8~9.7	1.1~2.0	12.2~13.2