


Bulbed Speed Rivet SHBCAP



Head Type	Countersunk Head
Material	A5056
Finish	Polished

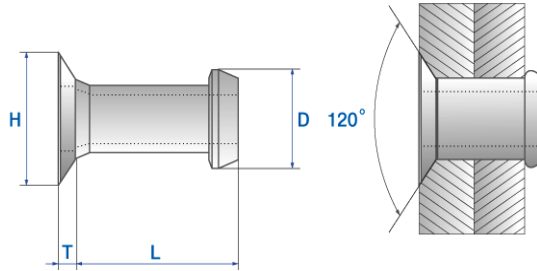

H = Head Diameter
 T = Head Thickness
 L = Body Length
 D = Rivet Diameter

*Dimensions in millimeters

Part Number	Rivet Diameter (D) nom.	Hole Size	Body Length(L)	Grip Range	Head Diameter (H)	Head Thickness (T)	Standard Strength (kN) typ.	
							Shear	Tensile
SHBCAP-032048	3.2	3.26~3.34	4.8	1.60~2.70	5.9	0.9	0.60	1.00
SHBCAP-032058			5.8	2.60~3.80				
SHBCAP-032068			6.8	3.60~4.80				
SHBCAP-032078			7.8	4.60~5.80				
SHBCAP-032088			8.8	5.60~6.80				
SHBCAP-040052	4.0	3.97~4.04	5.2	1.60~2.90	6.9	1.02	1.00	1.50
SHBCAP-040057			5.7	2.20~3.40				
SHBCAP-040062			6.2	2.70~3.90				
SHBCAP-040072			7.2	3.70~4.90				
SHBCAP-040082			8.2	4.70~5.90				
SHBCAP-040092			9.2	5.70~6.90				