


Assembly Fastening Systems



<b>Head Type</b>	Low Profile Flat Head
<b>Material(Body/Mandrel)</b>	AL Alloy / AL Alloy
<b>Finish(Body/Mandrel)</b>	Polished / Natural

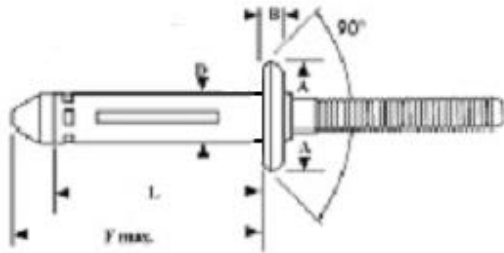

**A = Head Diameter**  
**B = Head Thickness**  
**L = Body Length**  
**D = Rivet Diameter**  
**F = Body All Length**

\*Dimensions in millimeters

Part Number	Rivet Diameter (D) Max	Hole Size	Body Length (L) Max	Body Length (F) Max	Grip Range	Head Diameter (A)	Head Thickness (B) MAX	Standard Strength (lbs) Typ	
								Shear	Tensile
HSFDAP-050195	5.2 (3/16")	5.3~ 5.6	19.6	23.8	3.20~6.35	10.9~11.6	1.5	600	400
HSFDAP-050230			23.0	27.0	4.75~9.50				
HSFDAP-050260			26.0	30.0	6.35~12.7				
HSFDAP-050290			29.0	33.3	9.50~15.8				
HSFDAP-050320			32.3	36.5	12.7~19.0				
HSFDAP-064210	6.3 (1/4")	6.4~ 6.6	21.0	25.6	3.20~6.35	13.6~14.0	1.8	1000	600
HSFDAP-064240			24.0	29.0	4.75~9.50				
HSFDAP-064270			27.0	32.0	6.35~12.7				
HSFDAP-064300			30.0	35.0	9.50~15.8				