




Head Type	Dome Head
Material	A5056
Finish	Polished

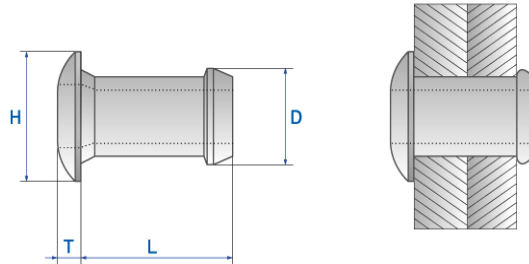

H = Head Diameter
 T = Head Thickness
 L = Body Length
 D = Rivet Diameter

*Dimensions in millimeters

Part Number	Rivet Diameter (D) nom.	Hole Size	Body Length(L) MAX	Grip Range	Head Diameter (H) MAX	Head Thickness (T) MAX	Standard Strength (kN) typ.	
							Shear	Tensile
SHBDAP-024040	2.4	2.36 ~ 2.44	4.0	1.20 ~ 2.40	4.2	0.9	0.2	0.4
SHBDAP-024041			5.0	2.20 ~ 3.40				
SHBDAP-024042			6.0	3.20 ~ 4.40				
SHBDAP-024043			7.0	4.20 ~ 5.40				
SHBDAP-024044			8.0	5.20 ~ 6.40				
SHBDAP-024045			9.0	6.20 ~ 7.50				
SHBDAP-032043	3.2	3.26~3.34	4.3	1.14~2.42	6.4	1.0	0.74	0.98
SHBDAP-032053			5.3	2.15~3.43				
SHBDAP-032063			6.3	3.17~4.45				
SHBDAP-032073			7.3	4.19~5.47				
SHBDAP-032093			9.3	6.22~7.50				
SHBDAP-040049	4.0	4.02~4.09	4.9	1.57~2.93	8.0	1.2	0.90	1.50
SHBDAP-040059			5.9	2.66~3.94				
SHBDAP-040069			6.9	3.68~4.96				
SHBDAP-040079			7.9	4.69~5.97				
SHBDAP-040089			8.9	5.71~6.99				
SHBDAP-048061	4.8	4.85~4.93	6.1	2.03~3.94	9.6	1.2	1.30	2.50
SHBDAP-048073			7.3	3.68~5.21				
SHBDAP-048086			8.6	4.95~6.48				
SHBDAP-048099			9.9	6.22~7.75				
SHBDAP-048111			11.1	7.49~9.02				